


# MRM-2 Interceptor

Quick-Start Guide v1.0



ORQA

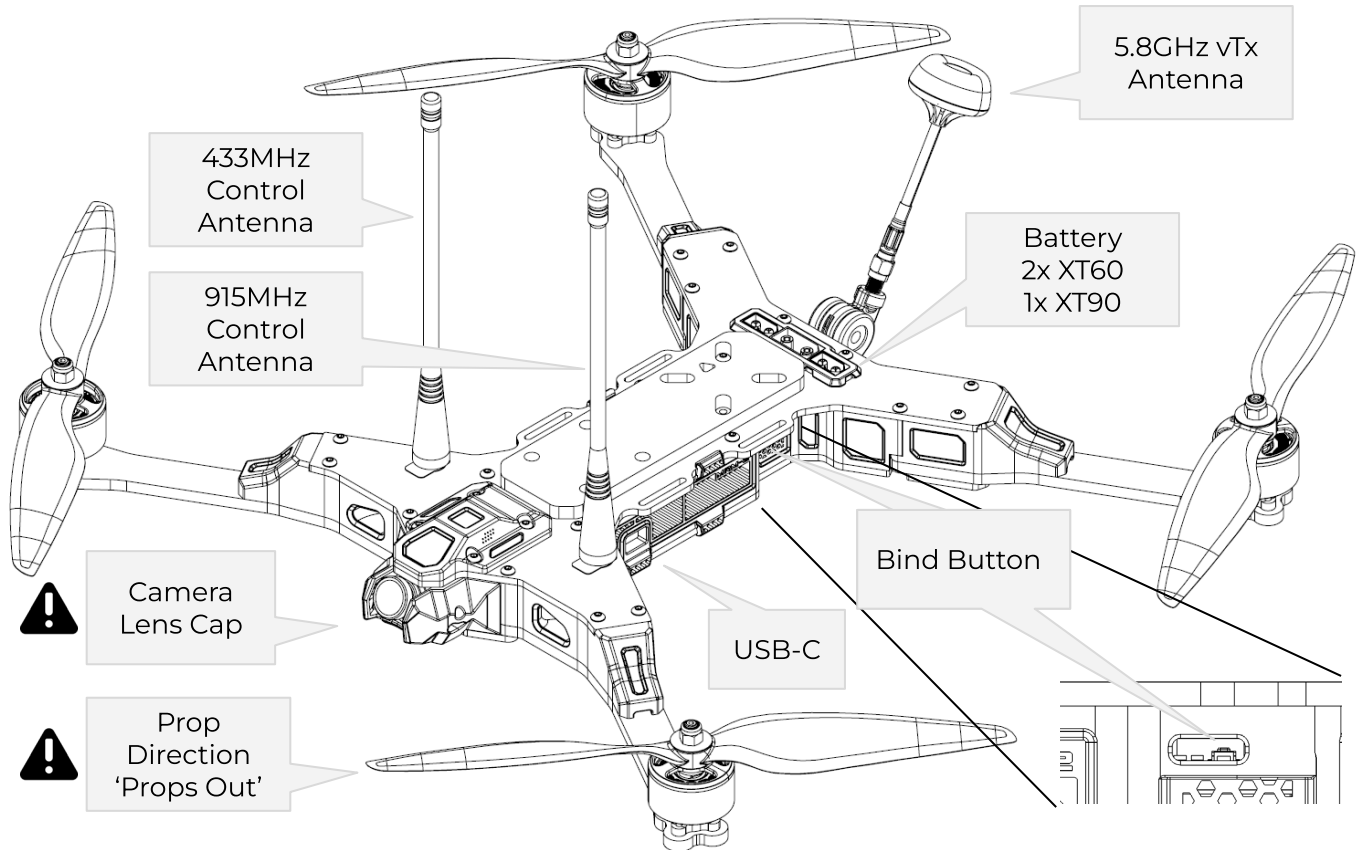

1. Props		2. Antennas		3. Battery		4. Binding	
Observe Prop Direction, <b>Props Out</b>		Control antennas are <b>SMA</b> (not RP-SMA). Ensure fitted correctly.		2 x <b>XT60</b> , 1 x <b>XT90</b> are in parallel for 2p or 1p packs		New drones are in <b>bind mode</b> , no need for bind button. Press bind button once after power-up to bind to new tx.	
5. Channels		6. Video		7. Band Switch		8. Camera	
Roll Pitch Throttle Yaw Arm	<b>CH1</b> <b>CH2</b> <b>CH3</b> <b>CH4</b> <b>CH5</b>	Control vTx, assign switch, in ghost Tx <b>Video Tx</b> menu.		Configure control bands in the ghost Tx <b>Radio</b> menu.		Ensure camera <b>lens cap is removed</b> before flight	
		<pre>VIDEO TX ▶Channel 1 5740MHz Band IRC Power 25mW Send On/Off None</pre>		<pre>RADIO ▶Radio 1... Radio 2... Select Band 1 Switch None</pre>			
9. Firmware						Documentation	
Betaflight <b>v4.4?</b> Installed by default. Use Betaflight Configurator <b>v10.9.0</b>							